Store extérieur sur mesure....



PERPIGNAN







Standars construction colours:




Real colours can be slightly different than colours above.

NICE















Standard construction colour:



Real colours can be slightly different than colours above.

Services

and spare parts

| Awning type | Wall bracket [pc.] | | Ceiling bracket [pc.] | | Rafter bracket [pc.] | | Side bracket COMO, CAPRI [pc.] | |
|--|-----------------------|-------|--------------------------|--------|-------------------------|-------|-----------------------------------|------|
| Code | MW-W02 | 17,00 | ME-S01 | 21,00 | MR-S03 | 31,00 | MN-W08 | 8,00 |
| PIANO MEZZO FORTE CROSS ADAGIO ALLEGRO | 13 cm 7 cm | | 13,5 cm | 6,5 cm | 40 cm | | | |

colours description: b - traffic white RAL-9016; k - oyster white RAL-1013; s - white aluminum RAL-9006; r - chocolate brown RAL-8017; t - anthracite

| Code Projection Price | Arms [pc.] MEZZO, ADAGIO, PRESTO | Code Projection Price | Arms [pc.] VIVO. PIANO, PRESTO | Arm support [pc.] MEZZO, ADGIO, PIANO |
|--|-------------------------------------|--|-----------------------------------|--|
| ME-M25L(colour) ME-M25P | | ME-P15L(colour) ME-P15P | | MM-WREL 57 Euro |
| 2,5 m - 105 Euro ME-M30L ^(colour) ME-M30P 3,0 m - 115 Euro | | 1,5 m - 86 Euro ME-P20L ME-P20L 2,0 m - 95 Euro | | |
| ME-M35L ME-M35P 3,5 m - 140 Euro | | ME-P25L ^(colour) ME-P25P 2,5 m - 100 Euro | | |
| ME-MF40L(colour) ME-MF40P 4,0 m - 300 Euro | | ME-M30L ^(colour) ME-M30P 3,0 m - 125 Euro | | FORTE ME-F01L 143 Euro ME-F01P |

| Service | Price for fabric collection [Euro/m²]* | | | |
|----------------------------------|--|--------|------|--|
| description | brown | silver | gold | |
| Fabric sewing (without exchange) | 35 | 35 | 41 | |

^{*} Price is charged for each m²

NET SURCHARGES:

Standard crank lenghts [cm]: 100, 150, 180, 200, 250 - included in awning price

CHAUFFAGE

PRO-01





Remote control

Standard construction colour:

RAL 9016



Traffic white Dark grey

Real colours can be slightly different than colours above.

Description:

| • Power 2 kW |
|--|
| • Dimensions |
| • Security class |
| • Heating surface |
| Control remote control |
| (4 heating phases) 25%, 50%, 75%, 100% |



SPECIFICATION OF ACRYLIC FABRICS

| Specification | | | Characteristics | | | |
|---------------|---------|----------|----------------------|-----------------------|--------------------------|------------------|
| Our | Origin | | Weight [g/m²] | UV resistance | Tensile strength [N/5cm] | |
| reference | Country | Supplier | UNE-EN ISO 2286-2 | UNE-EN ISO 105 B04 | Along the warp | Along the thread |
| CIT | Spain | Citel | 295 | 7 - 8/ 8° | 1300 | 750 |
| REC | Spain | Recasens | 290 | 7 - 8/ 8° | 1300 | 780 |
| T | Italy | Para | 300 | 7 - 8/ 8° | 1600 | 860 |
| SUN/DIC/ORC | France | Dickson | 290 | 4 - 5/ 5° | 1400 | 900 |


UV resistance:

| - 1 . | E | Optical: % of visible light | | |
|---------|-----------------|-----------------------------|-----------------|-----------------|
| Fabrics | Ts Solar | Rs Solar | As Solar | Tv Solar |
| | (transmission) | (reflection) | (absorption) | (transmission) |
| Dark | 0,33 - 16,19 | 6,95 - 48,48 | 35,33 - 92,72 | 0,33 - 7,08 |
| Light | 11,7 - 26,98 | 40,87 - 64,82 | 8,20 - 47,43 | 5,16 - 27,09 |


Nature of awning fabrics:

Despite the highest quality, there may be some imperfections on the fabric caused by the nature and properties of acrylic or polyester yarn and the necessity of sewing it or wrapping the edges.

1) Ripples: due to small movements during sewing, all fabrics impregnated with fluoride resins may have little ripples visible on the light, resulting refraction of sunlight.

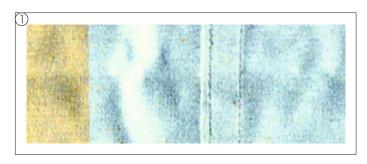

2) Ruffles: in the consequence of joining a fabric and wrapping the edges (double fabric thickness), ruffles similar to herringbone may occur.

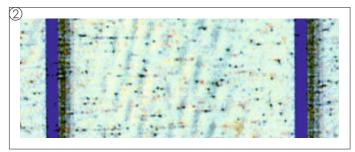

3) Lines "Veins": using resins that contain fluorides causes visible lines on the fabric in the place of crease - mainly noticeable on polyester fabrics.



PLEASE NOTE! All above imperfections are a consequence of natural characteristics of the fabric and it has to be familiar to the final users. It cannot be a cause of claim.









TISSUS ETANCHE



| Specification | | | | | |
|-------------------|--|--------------------------|-----------------------------|--|--|
| Properties Values | | Properties | Values | | |
| Waterproof | >100 cm water coloumn (ISO 811/81) | Composition | 100% acrylic dyed in a mass | | |
| Impregnation | Impregnation Acrylic, crease and stain resistant | | 325 g/m ² ±5 % | | |
| Tensile | Along the warp: 1550 ±5 % | The width of the roller | 120 cm ±1% | | |
| strength [N/5cm] | Along the thread: 900 ±5 % | The length of the roller | 60 m | | |

FORMES LAMBREQUIN

